



ULINE H-251 AND H-252 WALL RACKS

PARTS LIST

- A: Wall Mounting Back Plate (1 ea.)
- B: Washers (8 ea.)
- C: Rue Clip (2 ea.)
- D: Lag Bolt (4 ea.)
- E: 14 1/2" Arm (2 ea.), for Model #251
- F: 26 1/2" Arm (2 ea.), for Model #252

INSTRUCTIONS FOR ASSEMBLY/MOUNTING

- 1** Mount back plate to wall with 4 standard lag bolts and washers.
- 2** Align center hole to wall studs if possible. Other type of wall mounting may be required depending on surface.
- 3** Slide Arms (facing out) over each side of the pivot pin placing a washer on either side.
- 4** Slide Rue Clip into the hole at the end of the pivot pin.
- 5** Place Bubble or Foam roll over the end of the arm. Roll must have a minimum 2" core.

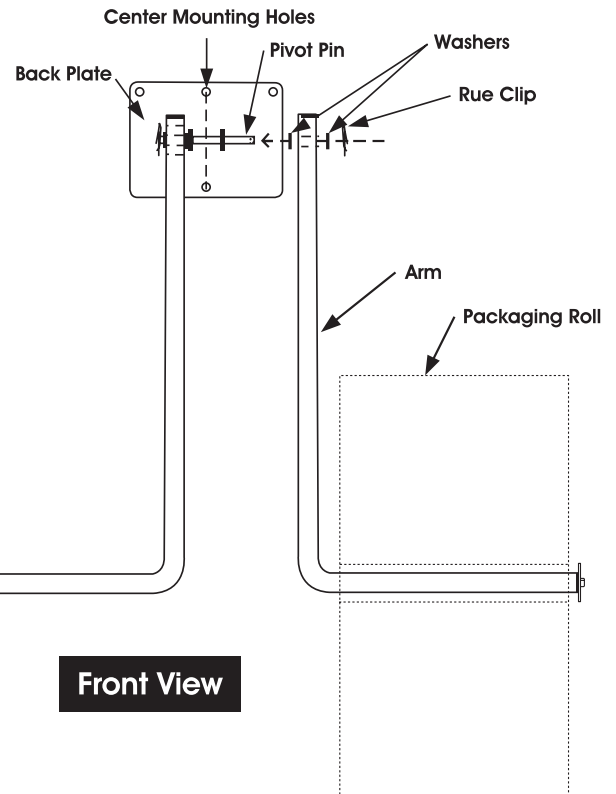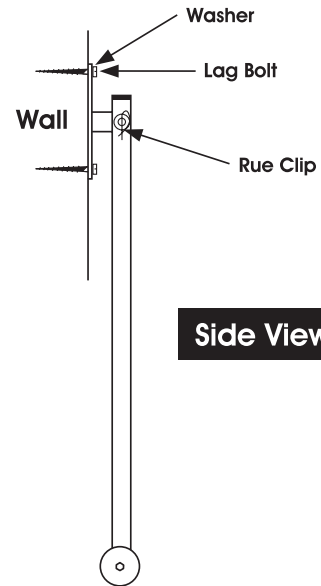

Detail of Rue Clip installation

